To the residents/users of this address

Would you prefer to read this letter in another language? Then go to www.warmtelinq.nl/denhaag



WarmtelinQ
c/o Gardens Business Centre
Anna van Buerenplein 41 (2nd floor)
2595 DA THE HAGUE
www.warmtelinq.nl/denhaag
info@warmtelinq.nl

Date
30 november 2023

This matter is being dealt with by
Melissa Morgenland

Subject

Continued work on De la Reyweg: starting Monday 4 December

Dear resident,

On behalf of WarmtelinQ, Heijmans will be working in your neighbourhood. We'll be laying a hot water pipeline underground. These are two pipes side by side: a supply pipe and a return pipe. In recent months we've been working on underground drilling. On 17 November we brought the first pipeline underground, and on Friday 1 December we did the same with the second pipeline. After that we'll remove the barriers, and the De la Reyweg towards the Veluweplein will be reopened most of the way. In total, we'll be working between the Terletstraat and the Veluweplein from mid-December to early September; not all at once, but divided into four phases. This letter tells you about the upcoming work, and what it means for you.

We'll be working in small working areas to minimise inconvenience.
This allows us to take up as few parking spaces as possible. Only the parking spaces that fall within the barriers of the work area will be temporarily out of use. This also applies to the underground waste containers located in the side street that directly borders the work area. Disabled parking spaces will be relocated.

From Monday 4 December we'll be cleaning up and working in smaller working areas on De la Reyweg.
In the coming period we'll be carrying out work on the carriageway towards the Veluweplein, between the Terletstraat and the Veluweplein. We'll lay the pipes underground with an open excavation. We'll do this in phases:

1. Between Monday 4 and Friday 15 December we'll clear our current work area. A large part of the De la Reyweg will reopen no later than 15 December. Construction fences, road barriers and construction materials will be removed. Most parking spaces will then be available for use again.
2. From Monday 18 December, we'll start cordoning off our 'new' work area – between the Barneveldstraat and the Veluweplein – with construction fences. This is the first phase.
3. We'll lay the pipes underground by means of an 'open excavation'. This means we'll dig open part of the street: a trench. This is where the pipes will be laid. This is similar to the work of a sewer project.
4. We'll reinforce the trench with sheet pile walls: metal 'screens' along the edge of the construction site. We'll carefully vibrate the sheet-pile walls into the ground. This may cause some vibration nuisance. This will take until about mid-January 2024.
5. Once the trench is dug, we'll insert the individual pipes of the pipeline one by one. We then will weld these together.
6. Once the pipes are in the trench, we'll remove the sheet piling, cover up the trench again and repair the street. We'll do this between the end of February and the end of March.

After step 6 the work area will shift and we'll cordon off the next work area between the Barneveldstraat and the Staverdestraat with construction fences. The process from steps 2 to 6 will be followed for all working areas until we reach the Terletstraat/Kempstraat area. We'll send you a new letter before the new phase starts.

How long will the work last?
The clearance work will begin on Monday December 4. We'll be working on the open excavation in mid-December, and we expect to be finished by early September 2024. There'll be no work during the period between Christmas and New Year, but the road will remain closed. On working days we'll be working from 7am to 5pm. If we have to deviate from these working hours we'll let you know.

You live or work close to our work, so you'll probably to notice some of it.
You can expect the following:



Fumes and dust
From windblown dust and exhaust fumes.



Noise
From excavators or pumps.



Different route
The De la Reyweg will be closed towards the Veluweplein.




Road closure
The Vaassenstraat will temporarily become a dead-end.



Bus 26 will run a different route until September
See HTM.nl or 9292.nl.


We'll be driving in the sheet piling for this phase from Monday 18 December to mid-January 2024.
To do the drilling safely, we'll install sheet pile walls. These are metal 'screens' along the edge of the construction site. We will carefully vibrate these sheet-pile walls into the ground. This work will start on Monday 18 December.



Do you live right next to the construction site? Then you may feel vibrations during the installation of the sheet piling.
We'll be monitoring whether the vibrations remain within legal limits, so we'll be installing meters for this purpose. These measure the vibrations: that way we can take action in time if necessary.

Going by car? Please note that the carriageway towards Veluweplein will remain closed.
Traffic *towards the Veluweplein* will take a different route. This carriageway will be closed between the Barneveldstraat and the Veluweplein for the coming period. From the Veluweplein, however, you can continue to drive *towards* the Kempstraat or the Dierenselaan.

Taking your bike or going on foot? The bicycle lanes and pavements will remain open.
Cyclists and pedestrians can cross at the Veluweplein or near the Barneveldstraat.

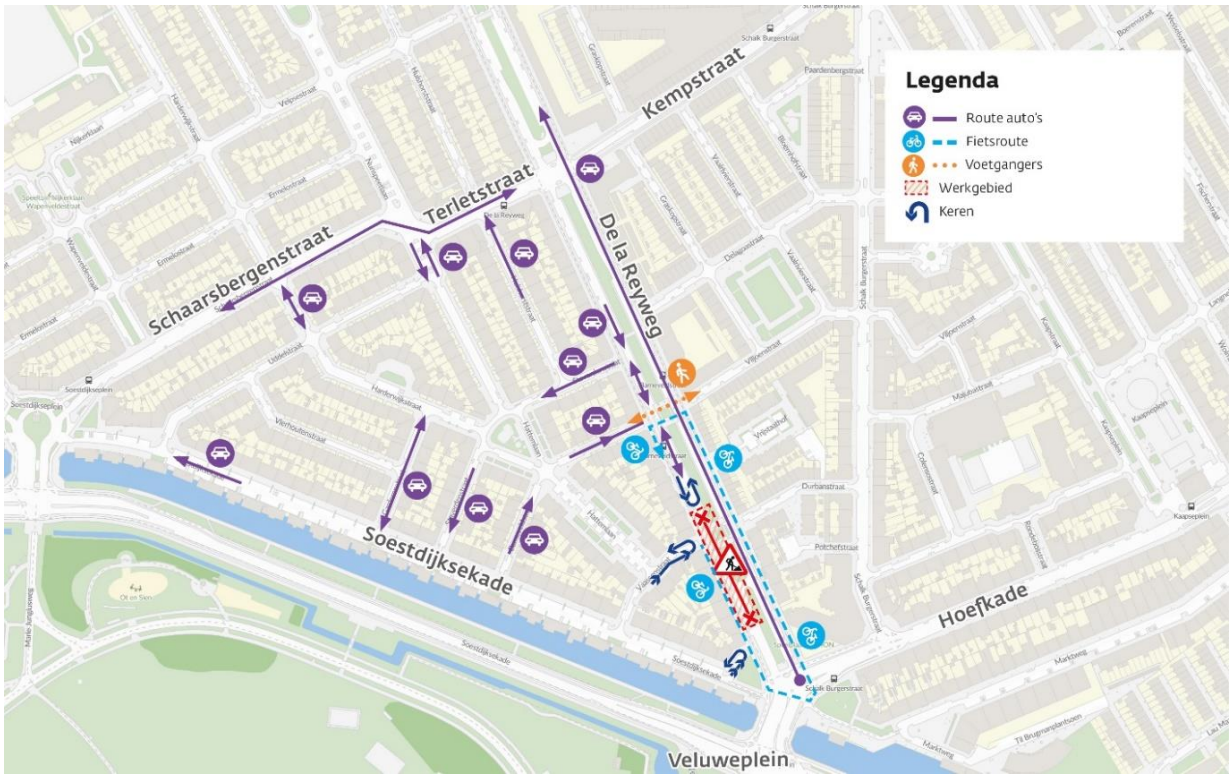

New traffic situation from 15 December. Closure on the De la Reyweg on the carriageway towards the Veluweplein, between the De Barneveldstraat and the Veluweplein.

[Text in map:
Legend
Car route
Cycle route
Pedestrians
Work area
U-turn]

Travelling by bus? Bus 26 will continue to run a different route.
From 9 December bus 25 will resume its normal route. Bus 26 will continue to make detours until September 2024. At www.htm.nl you can see where the bus will be running, and where you can get on and off.

Homes and businesses will remain accessible.
Pavements and cycle paths will remain clear at all times during the works. Homes and businesses will remain accessible, also for emergency services.

For more information, go to warmtelinq.nl/denhaag.
Do you have any questions, concerns or tips for us? Then go to www.warmtelinq.nl/denhaag. You can also call or text us on 06 3948 9911. Our email address is info@warmtelinq.nl.

Follow the 'WarmtelinQ The Hague' project on the BouwApp.
We'd like to keep you informed via the BouwApp. You can download the app from the Play Store (Android) or App Store (Apple), or scan the QR code.

Best regards,

Rinaldo de Lange
Heijmans Environment Manager